





K-1500 Compact series bucket sweeper

The SAMI compact series bucket sweeper is convenient for collecting sand and gravel spread on roads during the winter season. The bucket sweeper also allows quick and convenient collecting of building debris, litter at outdoor events, leaves etc. The waste can be lifted directly into a waste container or onto a truck. The sweeper collects during both forwards and backwards movement which makes it suitable for use in road building works.




FLOATING SYSTEM

Bucket sweeper follows the slope of the ground thanks to the floating frame system.




OLOFSFORS

Larger buckets have replaceable Olofsfors Bruxite™ wear blades under the front edge of the bucket for longer service life.




FLOW CONTROL VALVE

The flow control valve allows to adjust the rotating speed of the brush.




HARDOX®

There is a HARDOX® steel plate under the bucket, which helps to protect against wear.



DUST COVERS



Rubber flaps on the sides of the brush and between the bucket help to reduce the amount of flying dust.



BEELINE®

All SAMI sweepers use high-quality Beeline® brush rings produced in Finland.



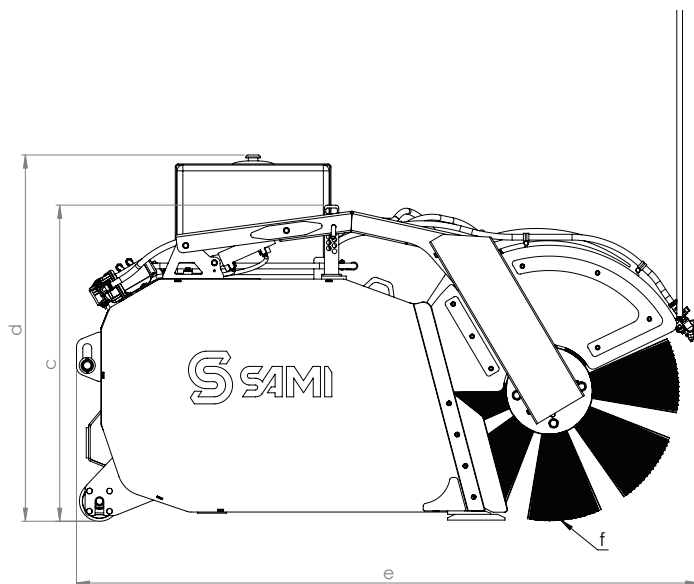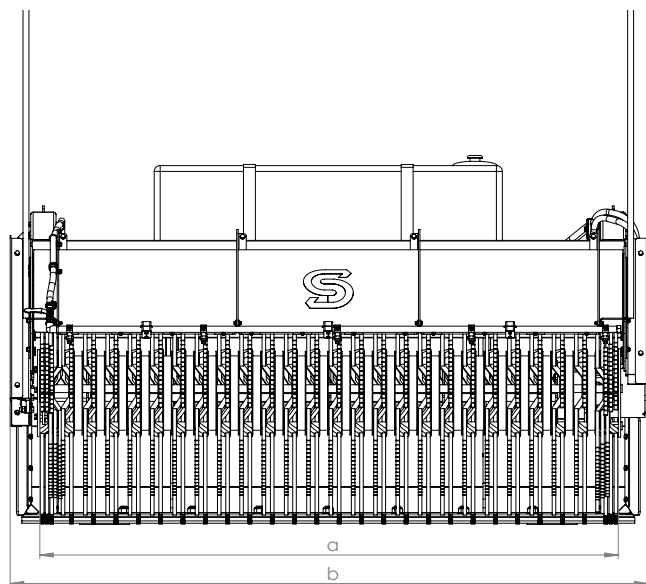

➤ It is possible to add a 600 l water tank set (cat. 1 + cat. 2) or a 1000 l water tank frame (cat. 2) to the tractor's 3P rear hitch.

Model	K-1500
Working width (a) (mm)	1500
Width (b) (mm)	1740
Height (c / d) (mm)	748 / 910
Depth (d) (mm)	1359
Brush diameter (f) (mm)	Ø550
Weight (kg)	330
Bucket capacity (l)	450
Water tank volume (l)	95
Oil flow (min. - max.) (l/min)	30 - 60
Oil pressure (max.) (bar)	200
1/2" couplings	1 pair
Rec. tractor weight (t)	1,5 - 3,5
Soovituslik traktori võimsus (hj)	40 - 80
Rec. tractor power (hp)	5 - 10
Standard equipment	Hydraulic control with flow control valve / Olofsfors blades
Additional equipment	Different water systems.
Fastenings	All the most common fastenings.
Material	Made from SSAB steel