





SW-1800 Compact series sweeper

The SAMI compact series sweeper is an efficient tool for maintaining hard-surfaced roads and areas. It is intended for use with a small tractor or loader with up to 70 horsepower. The sweeper effectively clears roads of light gravel, debris, tree leaves, and similar materials. Its strong and durable construction ensures long-term use.



TURNING ANGLE

Compact tractor sweeper can be turned hydraulically up to ±25 degrees.



MAXIMUM USE

The height of the sweeper can be adjusted according to the wear of the brush, allowing maximum use of the brush rings.



SUPPORT WHEELS

Support wheels ensure optimal sweeping height and unifrom wear of the bristles.



BEELINE®

All SAMI sweepers use high-quality Beeline® brush rings produced in Finland.












@sami.machinery

samimachinery.com



Compact series sweeper SW-1800

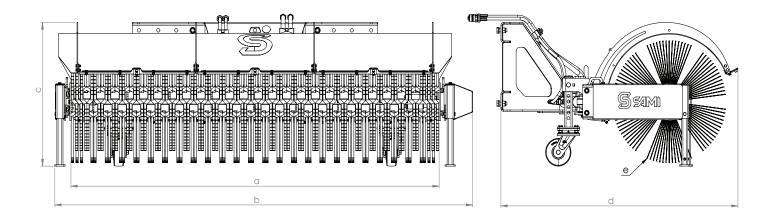

It is possible to add a 600 I water tank set (cat. 1 + cat. 2) or a 1000 I water tank frame (cat. 2) to the tractor's 3P rear hitch.

| Model | SW-1800 | |
|----------------------------------|--------------------------------------|--|
| Working width (a) (mm) | 1800 | |
| Width (b) (mm) | 2048 | |
| Height (c) (mm) | 647 | |
| Length (d) (mm) | 1158 | |
| Brush diameter (e) (mm) | Ø550 | |
| Turning angle (°) | ±25 | |
| Weight (kg) | 190 | |
| Oil flow (min max.) (I/min) | 30 - 60 | |
| Oil pressure (max.) (bar) | 200 | |
| 1/2" couplings | 2 pairs | |
| Recommended tractor weight (t) | 1,5 - 3 | |
| Recommended tractor power (hp) | 35 - 70 | |
| Recommended working speed (km/h) | 5 - 10 | |
| Standard equipment | Hydraulic turning angle | |
| Additional equipment | Water system, dust cover, LED lights | |
| Fastenings | All the most common fastenings | |
| Material | Made from SSAB steel | |
| | | |







